

FP100

1" Interlocking Flush Panel

PRODUCT DESCRIPTION


- Flush panel system designed for use in soffit, mansard and wall applications
- 15-inch wide flush panel system provides a smooth flat surface to complement to any architectural metal roofing system

1" Interlocking Flush Panel; max width 15.5"; concealed, interlocking seams fastened with (2) #10-12 x 1" long No. 2 Phillips drive pancake head, wood screws; fastening metal to panel to Wood or Steel Substrate; maximum 12" fastener spacing; Panel Rollformer: Schleich Quadro-Plus Rollformer; Oil Canning is a characteristic of light gauge architectural metals and is not a flaw and therefore is not a cause for rejection.



SENTRIGARD
METAL ROOFING SYSTEMS

www.sentrigard.com

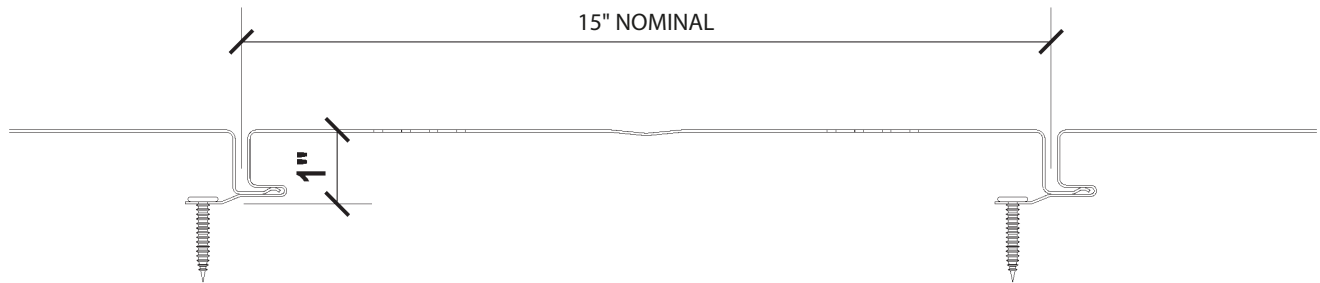

DESIGN INFORMATION

- Vertical or Horizontal Application
- Actual Panel Width: 15.5" from 20" Coil
- Solid Substrate or Open Framing
- Architectural Soffit/Wall Panel
- Concealed Fastener Attachment – No Clip Required
- 24 and 26 Gauge Galvalume*
- .032" Aluminum
- 16oz Copper
- 30 Year Finish Warranty on Kynar 500 Finish
- Weather Tight Warranty Not Available
- Underlayment Not Required
- Vented or Non-Vented

TEST REPORT SUMMARY

- No Testing Performed